

Installation instructions for screwed mast and multi-mast base bracket

Please do not install the three-part screw mast until the rubber holding part of the mast base has been inserted into the lowest mast segment (and, if necessary, the lower flange part of the **SilentShark 601** has been attached to the upper end of the mast using two screws or by welding).


The multi-mast holder is an excellent fit for our heavy-duty screw mast.
For our screw pole, please use the included thinner additional rubber adapter to adjust the diameter. Liquid soap (dishwashing detergent) is required for assembly! Lubricate the mast mount with a small amount of liquid soap so that the rubber adapter slides more easily over the mast mount.

Leave approx. 5mm protrusion at the upper end. This makes it easier to insert into the mast without damaging the rubber. Now lubricate the inside of the mast and the outside of the rubber adapter with plenty of liquid soap. It should now be possible to insert the mast bracket into the mast base without any great difficulty!

Wrap plenty of Teflon tape (supplied) around the screw threads of the mast. The Teflon tape prevents salt water from penetrating the thread. You can now screw the mast together.

Now check the installation site. Both the mast base screws and the bracing fittings should be screwed through the deck for maximum stability. We recommend laying the necessary cables in the mast before final mast installation.

The mast is braced using the enclosed fittings. The outer diameter of the stainless steel fittings is 18 mm, which means that the suitable bracing tube has an inner diameter of 18 mm (stainless steel A4). Cut the bracing tubes to length so that they fit tightly and screw them together.

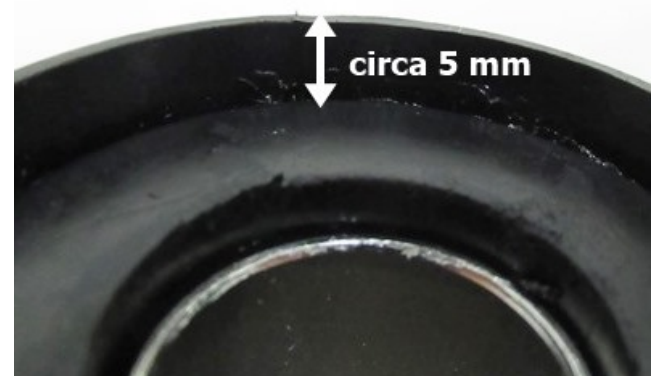

Check the screw connections of the mast fastening at regular intervals, especially shortly after mounting the mast!